

Small Mixers


Today's applications demand high-performance process equipment accompanied by total support for customers' mixing needs. To address these requirements, Chemineer offers a line of top-entering and portable mixers. Superior materials of construction throughout, along with advanced modular designs give each one the strength, flexibility and reliability to perform to the same standards as all Chemineer agitators and mixers.

Portable Models

- XPC (C-clamp mount standard, as shown)
- Express, standard models ship in 48 hours
- Standard IEC motor
- High strength, low weight cast aluminum housing
- Integral handle for ease of positioning
- Multi-directional clamp for horizontal and vertical adjustment
- Optional cup plate mounting for increased stability
- Direct Drive — 1400 RPM

Open Tank Models

- DTD models
- Easy installation
- Low maintenance
- Express, standard models ship Ex Works in 3 – 5 days
- Integral motor/gear drive — 290 RPM
- Capable of handling solids or high viscosity applications
- 25mm or 40mm shaft diameter
- Sealed for life gearboxes

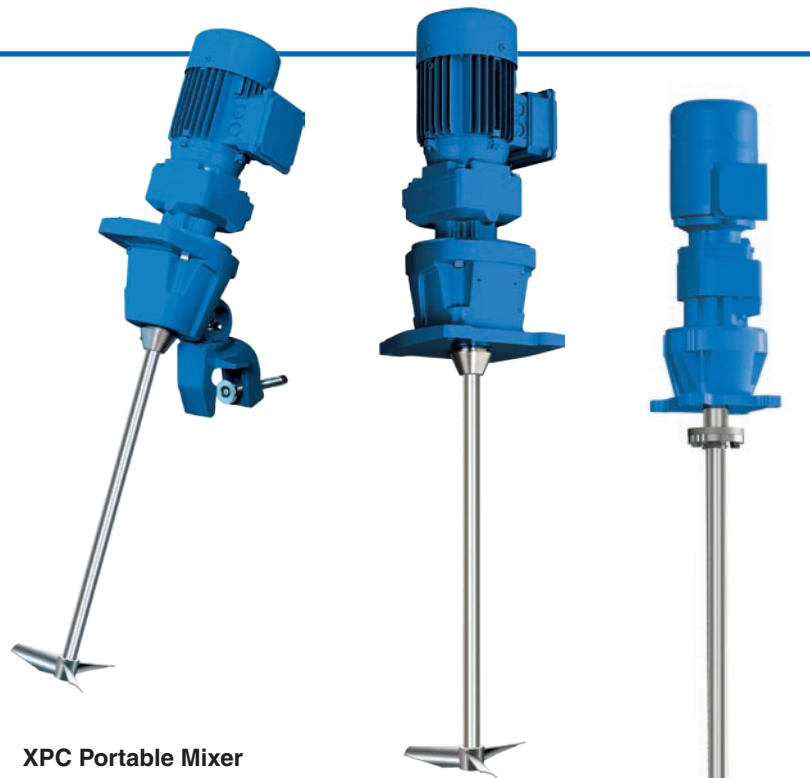

XPC Portable Mixer

DTD Open Tank Mixers




Clamp Mount




Cup Plate Mount



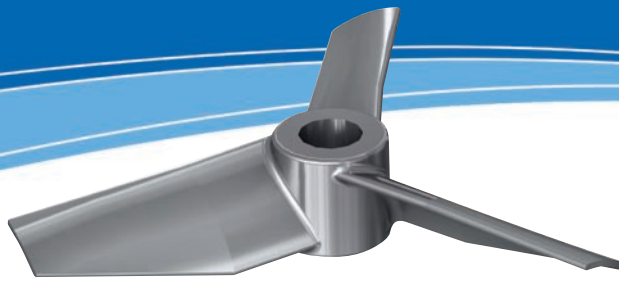

SC-3 Impeller

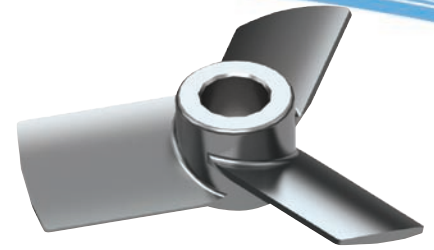

JP-3 Impeller

Impeller Options

Chemineer impeller designs are the result of over 60 years of research and applied application experience. Chemineer developed technologies are applied to thoroughly analyse all process parameters, ensuring proper impeller selection for optimal performance in every application. Carbon steel, 316/316L stainless, high alloys and coatings are available.

The **SC-3 impeller** features an advanced design that produces flow characteristics of larger impellers without added weight or loss of efficiency. The SC-3 is a high pumping axial flow impeller with low shear used for blending and motion or solid suspension.

The **JP-3 impeller** is a marine style energy efficient design ideal for small batches and is able to handle higher viscosities than standard hydrofoil designs. It is a high efficiency axial flow impeller used for liquid blending on our smallest turbine agitators.

Quick Selection Guide

Product	Viscosity (cP)	Volume (L)					
		250	500	1000	2000	4000	5000
Water, Kerosene	1	30XPC-1.5 125mm JP-3	30XPC-1.5 135mm JP-3	30XPC-1.5 160mm JP-3	20DTD-0.75 270mm SC-3	20DTD-0.75 365mm SC-3	20DTD-0.75 365mm SC-3
Olive Oil	100	30XPC-1.5 135mm JP-3	30XPC-1.5 150mm JP-3	30XPC-1.5 160mm JP-3	20DTD-0.75 290mm SC-3	20DTD-0.75 365mm SC-3	40DTD-1.5 390mm SC-3
Glycerin	500	30XPC-1.5 150mm JP-3	30XPC-1.5 150mm JP-3	20DTD-0.75 290mm SC-3	20DTD-0.75 320mm SC-3	40DTD-1.5 390mm SC-3	40DTD-1.5 420mm SC-3
Castor Oil	1000	30XPC-1.5 160mm JP-3	30XPC-1.5 160mm JP-3	20DTD-0.75 320mm SC-3	20DTD-0.75 320mm SC-3	40DTD-1.5 420mm SC-3	40DTD-1.5 420mm SC-3

Based on SG = 1



NOV Mono—Australia
75 Frankston Gardens Drive
Carrum Downs
Melbourne, Victoria, 3201
Telephone: 1800 333 138
Email: ozsales@nov.com

Chemineer EMEA
7 Cranmer Road, West Meadows
Derby DE21 6XT, England
Telephone: +44 (0) 1332 363 175
Email: chemineeruk@nov.com

Chemineer, Inc.
5870 Poe Avenue
Dayton, Ohio 45414
Telephone: (937) 454-3200
Email: chemineer@nov.com

Chemineer, Inc.
125 Flagship Drive
North Andover, MA 01845
Telephone: (978) 687-0101
Email: navinfo@nov.com

www.kenics.com
www.greercomixers.com

NOV Mono—New Zealand
35–41 Fremlin Place
Avondale, Auckland 1026
Telephone: +64 (0)9 829 0333
Email: info@mono-pumps.co.nz

Chemineer International Sales Offices:
Brazil, China, Mexico, Singapore

1-800-643-0641 • www.chemineer.com

Bulletin 704-AU



National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility or liability for any loss, damage or injury resulting from the use of information and data herein. All applications for the material described are at the user's risk and are the user's responsibility. All brands listed are trademarks of National Oilwell Varco.